

PROJECT NAME: _____

CATALOG #: _____

NOTES: _____

DATE: _____

BLS-CAR LED CARRIAGE POST-TOP

The BLS-CAR Carriage Post-Top is a traditional decorative fixture for outdoor lighting that's reminiscent of early American style.

SPECIFICATIONS FEATURES

Color Temperature Tuning: Capable of delivering 3000K, 4000K & 5000K color temperatures

Construction: Die cast aluminum housing and front frame with black powder coat finish over a chromate conversion coating. Housing features an integrated heat sink and driver compartment built into the fixture design

Lens: Glass or Polycarbonate

Voltage: 120-277V


Lifespan: Estimated 50,000 Hour

Operating Temperature: -40°C to 45°C (-40°F - + 113°F)

Listings: IP65


Warranty: 5 year warranty

NOTE- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(±5°C) specifications subject to change without notice.

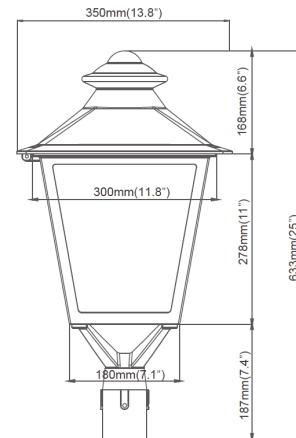

ORDERING GUIDE

SAMPLE: BLS-CAR-YTP350-60-D-T5-1-30-C2-Z2-PC1




MODEL	STYLE	WATTAGE	FINISH	DISTRIBUTION	VOLTAGE	CCT	LENS	TENON	OPTIONS
BLS-CAR	YTP350	60 - 60W, 50W, 30W ¹ 100 - 100W, 60W, 30W ¹	D Dark Bronze CC Custom Color	T5 - Type V	1 120-277V	ADJ - 3000K, 4000K, 5000K	C2 - Glass C3 - Polycarbonate	Z2 - 2 3/8" Z3 - 3"	PC1 - Photocell


Note:
1. Power Adjustable

STRUCTURAL DESIGN


ADC 12 aluminum die casting, fine heat dissipation

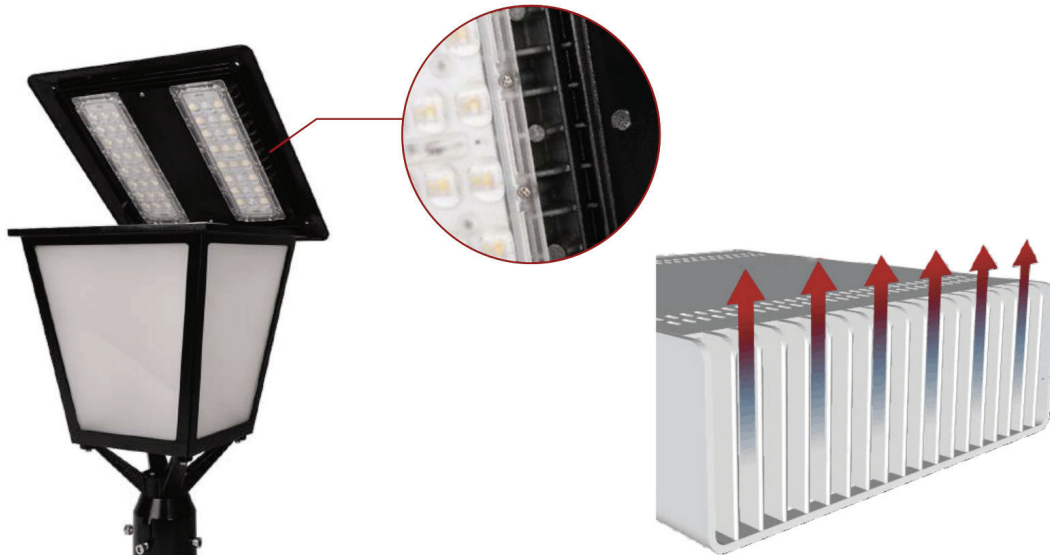

CCT Select & Power Select

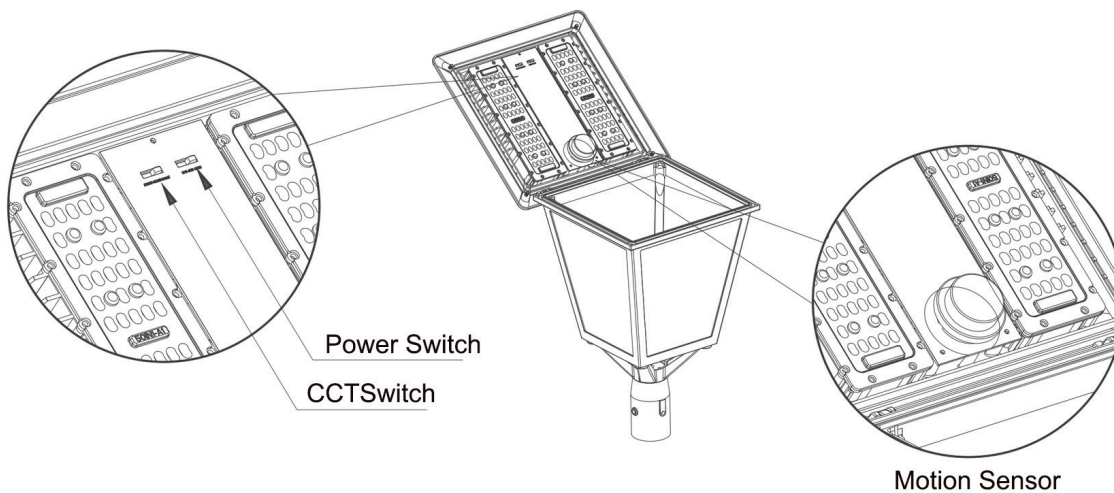

PHOTOMETRICS

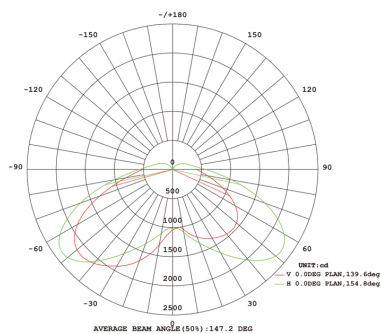

PERFORMANCE DATA

	3000K(72CRI)		4000K (72CRI)		5000K (72CRI)	
SYSTEM WATTS	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
30W	3060lm	102 lm/W	3150lm	105 lm/W	3120lm	104 lm/W
50W	5100lm	102 lm/W	5250lm	105 lm/W	5200lm	104 lm/W
60W	6120lm	102 lm/W	6300lm	105 lm/W	6240lm	104 lm/W
100W	10200lm	102 lm/W	10500lm	104 lm/W	10400lm	104 lm/W