BASELINE
BY LUMECON

PROJECT NAME: _____ CATALOG #: _____

NOTES: _____ DATE: _____

BLS-CAR
LED CARRIAGE POST-TOP

The BLS-CAR Carriage Post-Top is a traditional decorative fixture for outdoor lighting that's reminiscent of early American style.

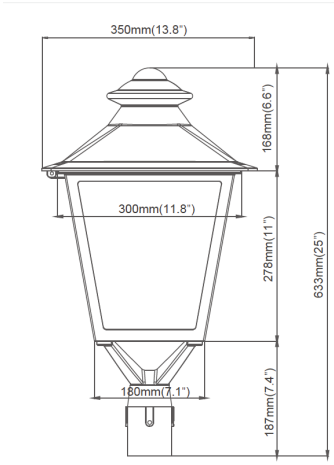

SPECIFICATIONS FEATURES

Color Temperature Tuning: Capable of delivering 3000K, 4000K & 5000K color temperatures

Construction: Die cast aluminum housing and front frame with black powder coat finish over a chromate conversion coating. Housing features an integrated heat sink and driver compartment built into the fixture design

Lens: Glass or Polycarbonate

Voltage: 120-277V

Lifespan: Estimated 50,000 Hour

Operating Temperature: -40°C to 45°C (-40˚F - + 113˚F)

Listings: IP65

Warranty: 5 year warranty

NOTE- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(±5°C) specifications subject to change without notice.

ORDERING GUIDE

SAMPLE: BLS-CAR-YTP350-60-B-T5-1-30-C2-Z2-PC1

MODEL	STYLE	WATTAGE	FINISH	DISTRIBUTION	VOLTAGE	CCT	LENS	TENON	OPTIONS
BLS-CAR	**YTP350**	**60** - 60W, 50W, 30W[1] **100** - 100W, 60W, 30W[1]	**B** - Black **CC** - Custom Color	**T5** - Type V	**1** - 120-277V	**ADJ** - 3000K, 4000K, 5000K	**C2** - Glass **C3** - Polycarbonate **NL** - No Lens[2]	**Z2** - 2 3/8" **Z3** - 3"	**PC1** - Photocell

Note:
1. Power Adjustable
2. Required for Dark Skies compliant fixture

Specifications and photometric data are subject to change at any time without notice. REV07222024

STRUCTURAL DESIGN

ADC 12 aluminum die casting, fine heat dissipation

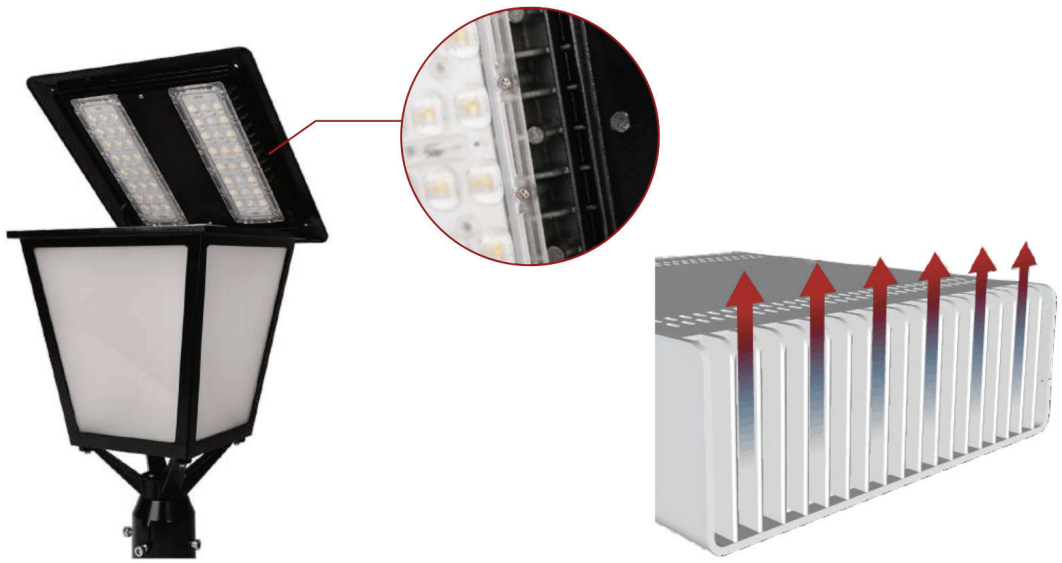

CCT Select & Power Select

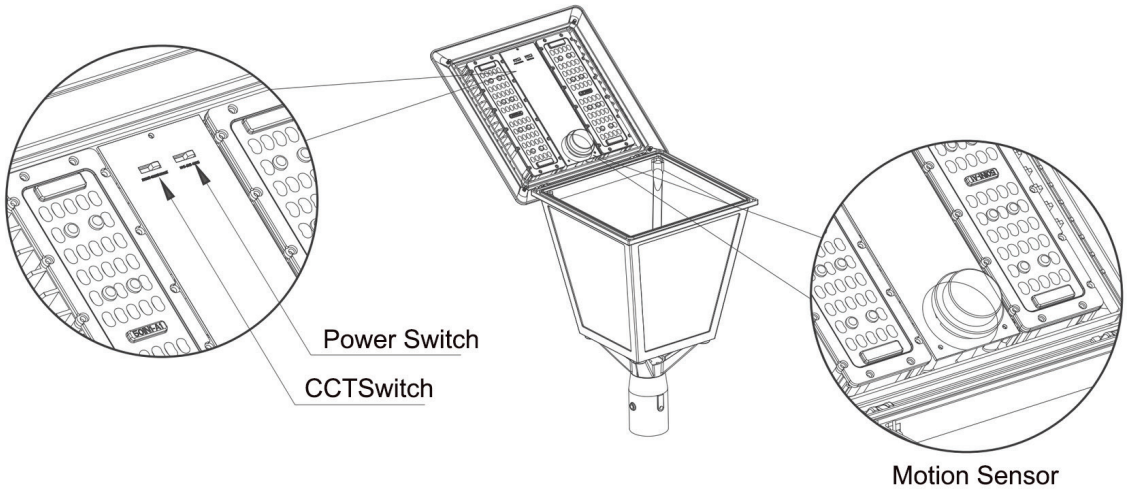

PHOTOMETRICS

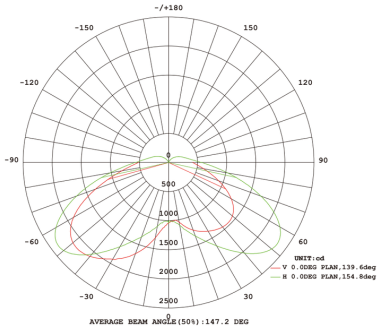

Specifications and photometric data are subject to change at any time without notice. REV07222024

PERFORMANCE DATA

	3000K(72CRI)		4000K (72CRI)		5000K (72CRI)	
SYSTEM WATTS	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
30W	3060lm	102 lm/W	3150lm	105 lm/W	3120lm	104 lm/W
50W	5100lm	102 lm/W	5250lm	105 lm/W	5200lm	104 lm/W
60W	6120lm	102 lm/W	6300lm	105 lm/W	6240lm	104 lm/W
100W	10200lm	102 lm/W	10500lm	104 lm/W	10400lm	104 lm/W

Specifications and photometric data are subject to change at any time without notice. REV07222024