





Catalog Number:	
Project:	
Comments:	
Prepared By:	Date:

Description

The LWS-SFC Small full cut-off wall pack delivers the illumination performance to replace up to a 175W HID fixture one-for-one. The compact size of the LWS-SFC makes this an energy saving solution for outdoor building facades, general security, storage areas, and entry door applications.

Dimensions & Weights

Model	Width	Height	Depth	Weight
LWS-SFC	7.87"	8.15"	4.25"	5.5 lbs

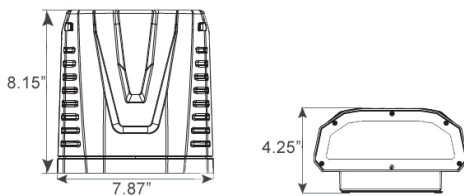

Field adjustable up to 90°

Technical Specifications

Input Voltage: 120-277V

Housing: Die cast aluminum housing with full cutoff and textured architectural bronze powder coat finish over a chromate conversion coating. 1/2" coin plugs with O-rings for conduit & photocell installation.

Lens: Tempered Clear Glass Lens with an impact-resistant Polycarbonate option for vandal resistance in high abuse lighting environment.

Mounting: Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit.

Effective Projected Area (EPA): 0.26 ft²

Color Temperature: 2200K, 2700K, 3000K, 4000K (standard), 5000K.

LED Lifetime: All LED's are rated for a minimum of 100,000 hours of continuous operation at ambient temperatures from -40°F/-40°C to 95°F/35°C.

Color Rendering Index (CRI): Minimum of 80 or higher. CRI 90+ available upon request. CRI 90+ not available in 2200K.

Dimming: 0-10V standard dimming capability.

Surge Suppression: 6kV

Battery Back-Up and Battery Back-Up Cold Rated (Optional): The BBU operates the LEDs for a code-compliant 90 minutes when triggered into emergency mode. When AC power is restored, the driver automatically returns to charging mode. The BB and BBCR are UL-recognized component and meets all applicable safety standards. BBCR is cold rated to -20°C.

Lumecon ETD™ System: The enhanced thermal dissipation system engines are thermally bonded to provide maximum thermal dissipation to the exterior of the fixture to ensure long life. To protect the light engine panel from moisture and corrosion, the LED light engine panel is uniformly coated with a UV stabilized acrylic polymer resin that meets MIL and ASTM dielectric standards, UL, and IPC standards for flammability, moisture resistance and thermal shock.

Limelight Wireless Controls: Limelight by Lutron is a wireless lighting control solution for outdoor and industrial facilities that provides remote control and management, saves energy, and enhances facility safety. This option includes a factory-installed wireless control module and sensors that seamlessly integrate data into Lutron's existing data and management platform, Enterprise Vue.

Certification Data: ETL Listed to UL 1598, UL 8750 and CSA 22.2 No. 250. *Full compliance and test documentation is available for TM-21, LM-79, LM-80, ETL Listing to UL1598 and UL 8750.

DesignLights Consortium® (DLC) Qualified Product: Unless noted, not all versions of this product may be DLC® qualified. For a complete list of Lumecon DLC® Qualified Products visit: www.designlights.org.

Manufacturing Origin: US Manufactured and Assembled.

Buy American: Meets Buy American requirements within the ARRA.

Warranty: 10 Year L70 performance based warranty. For full warranty terms, please visit our website: www.lumecon.com



Ordering Information

LWS-SFC – Options / Ordering Example: LWS-SFC-30-DB-1-40

Wattage	Color	Voltage	Color Temperature
10 - 10 Watts	DB - Dark Bronze	1 - 120v-277v	22 - 2200K
20 - 20 Watts	CC - Custom Color		27 - 2700K
30 - 30 Watts			30 - 3000K
			40 - 4000K
			50 - 5000K

Options & Accessories

BB - Battery Back-Up 120v-277v*
Requires external box

BBCR - Battery Back-Up Cold Rated 120-277v*
Requires external box

PC1 - 120v-277v Button Eye Photocell

OC1 - On/Off

OC2 - Dim/High

SP - 40kV Surge Suppression MOV

PL - Polycarbonate Lens

LLC- Limelight by Lutron Radio Module
Not available with UH voltage or PC1 option.

LLCM- Limelight by Lutron Radio Module and PIR Sensor Assembly
Medium Mounting Height (>15 to 30' mounting height) - Not available with PC1 option.

LLCL- Limelight by Lutron Radio Module and PIR Sensor Assembly
Low Mounting Height (8-15' mounting height) - Not available with PC1 option.


If OCC Sensor Option is selected, mounting height specifications need to be clarified: Mounting height between 0' - 10'

If Mounting height and parameter settings not specified when ordered. Default mounting height is 10-40' lens and preset factory settings. Mounting height between 10' - 20'


Mounting height over 20'+

OCC Sensor Patterns


0' - 10' Mounting Height

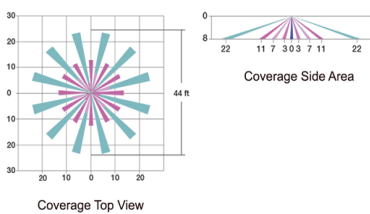

10' - 40' Mounting Height

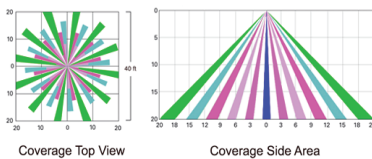

40' + Mounting Height

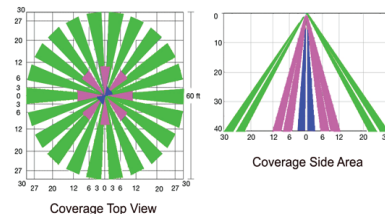

Occupancy Sensor Default Settings - Option OC2

Option	Dimmed State (Unoccupied)	High Level (When occupied)	Photocell Operation (OC4 Option Only*)	Dwell Time (Occupancy time delay)	Ramp-up Time (From unoccupied to occupied)	Ramp-up Time (From occupied to unoccupied)
OC2 and OC4	Approx. 20% Output	100% Output	Enabled @ 1.5 FC*	5 Minutes	Disabled	Disabled

*Note: OC2 and OC4 settings including photocell set point, high/low dim rates, and occupancy sensor time delay are all configurable by using the Wattstopper® App. If any other settings are desired to be set at the factory, please note these changes on Purchase Order.

Performance Data

Model	Watts	2200K		2700K		3000K		4000K		5000K	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
LWS-SFC-10	10W	1,093	112	1,233	127	1,254	128	1,362	140	1,378	142
LWS-SFC-20	20W	2,010	99	2,268	112	2,295	113	2,506	124	2,532	125
LWS-SFC-30	30W	2,855	95	3,311	110	3,476	116	3,658	122	3,772	126